

IN HOME CATV AMPLIFIER WITH LED INDICATORS QUADRUPLE RETURN PATHS



HMV 41 shop
Article number 695004725

PRODUCT CATEGORY: 20 CATV
STATUS: AVAILABLE



Product

IN HOME CATV AMPLIFIER WITH LED INDICATOR QUADRUPLE RETURN PATHS

HMV 41 shop

In home CATV amplifier suitable for 5-1218MHz. Very low power consumption. Separate LED's to indicate power, incoming signal and return path signal. Active return path on all four outputs. Different amplification per port for different cable lengths. Optimized for high speed modems. White housing with both blue and white design strip included for user customization. Metal sticker included to cover the three LED's when desired. This product has an extended warranty period of five years. In order to activate this guarantee the end user needs to register this product after purchase on the website www.5-years-warranty.net.



Properties

5 Year Warranty	4G/LTE Proof	Screening Class >A+
Easy install	Interactive return paths	1.2 GHz Ready
MoCA module Ready	LED-indicators	High Durability
Ultra HD/4K	Low Power	

Certificates



Included

- High efficiency internal power supply.
- Metal led cover sticker.
- Shielding strip in white and blue.

Tools

- 1 piece Cable stripper CST 5 shop
Article number 695004806



Instruction video

www.montagefilm.net

Instruction card

www.install-your-catv.net

Mechanical Specifications

Dimensions (h x w x d)
150 x 135 x 45 mm

Weight
0.65 kg

Color
White RAL 9016

PRODUCTSHEET

HMV 41 shop

IN HOME CATV AMPLIFIER WITH LED INDICATION QUADRUPLE RETURN PATHS

Specifications

Type	HMV 41	
Frequency range forward	85 - 1218 MHz	
Frequency return path	5 - 65 MHz	
	RETURN	FORWARD
Gain Output 1	1.5 dB	5.0 - 5.5 dB
Gain Output 2	1.5 dB	5.0 - 5.5 dB
Gain Output 3	1.0 dB	6.0 - 7.0 dB
Gain Output 4	2.0 dB	7.0 - 8.5 dB
Impedance	75 Ohm	
Input level	< 77 dB μ V	
AC connection	Cord with Euro plug	
Supply voltage	185-265 VAC	
Frequency	50 Hz	
Power consumption	3.4 W	
Operating temperature	0 to +55°C	
Protection class	IP 20	
RF in- and outputs	F-female	
Blue status LED DS (downstream)	Minimum acquired signal level is present.	
Blue status LED US (upstream) :	Blinks as the modem sends data; frequency depending on amount of data.	

Contact

🏠 Pampuslaan 170
1382 JS WEESP

✉ info@hirschmann.nl


☎ NL 31 (0)294 46 25 55
BE 32 (0)2 46 13 095

🌐 www.linkedin.com/company/hirschmann-multimedia

📘 www.facebook.com/hirschmann.multimedia

📺 www.youtube.com/HirschmannMultimedia

Installation diagram

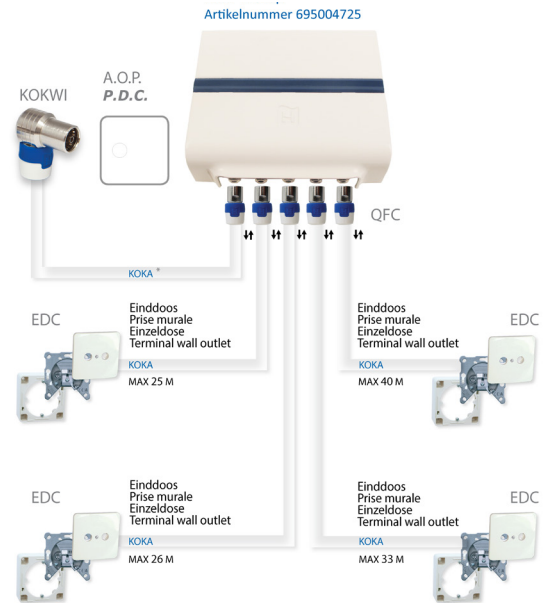

*AANSLUITSET VOOR IN HOME CAI-VERSTERKERS

Voor de installatie van in home CAI-versterkers is een aansluitset van Hirschmann Multimedia verkrijgbaar met de producten voor 4G proof verbindingen.
SET 4114 shop - Artikelnummer 695020495

Related product - KOKA 9 Eca/100 m white

Article number 298799801

www.hirschmann-multimedia.com/CPR



Related product - SET 4114 shop


For in home CATV amplifiers

Article number 695020495



Related product - EDC 1000 shop

Article number 695003008



Hirschmann Multimedia B.V.

Hirschmann Multimedia B.V. is an international knowledge company and manufacturer, located in Weesp - The Netherlands. Hirschmann Multimedia focusses on leading the market by being innovative, flexible and renewing.

Hirschmann Multimedia Products (HMP):

Serving the retail and installer market, Hirschmann Multimedia Products is expanding from The Netherlands and Belgium towards 16 other European countries as of 2014. Through a qualified and selected dealer and installer network, HMP provides in products for COAX, IP and satellite systems.