




TRADIM®

GEBRUIKSAANWIJZING VLOERDIMMER 31030 SERIE

Deze vloerdimmer is geschikt voor **gloeilampen, hoogvolt halogeenverlichting** 230V (40-500W) en **laagvolt halogeenverlichting** in combinatie met een dimbare transformator. Uitsluitend binnenshuis toepassen. Deze vloerdimmer is voorzien van een zekering.

De producent is niet aansprakelijk voor schade ontstaan door foutief gebruik of ondeskundig installeren van de dimmer. De garantieperiode is 2 jaar na aankoopdatum, aan te tonen d.m.v. uw aankoopbon.

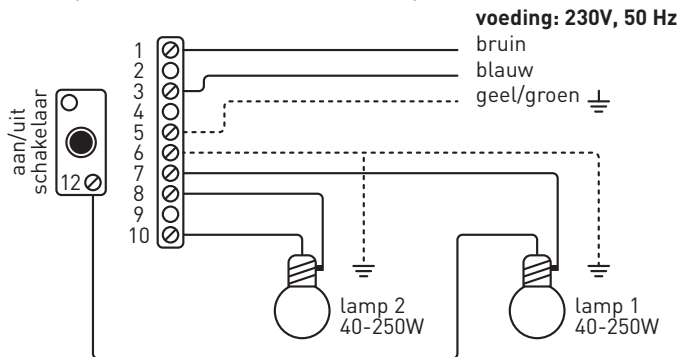

Lamp 1: aan/uit functie

Lamp 2: te bedienen met schuifknop. Aan/uit en dimmen.

INSTALLATIE:


- Schakel voor het installeren altijd eerst de stroom uit!
- Schroef de behuizing open en neem de bovenzijde af
- Strip de voedingsdraden voldoende en draai deze stevig vast op plaats 1 & 3 (zie tekening)
- Installeer bij schroef 7 & 12 de bedrading die de lamp aanstuurt voor aan /uit schakeling (drukknop)
- En bij schroef 8 & 10 de bedrading die de lamp dimt middels schuif
- Plaats de bovenzijde terug en draai de schroeven vast. Zorg dat de draden goed vastgeklemd zitten onder de trekontlasters



INSTRUCTION MANUAL FLOOR DIMMER 310X-SERIES

This floor dimmer is suitable for incandescent lamps, high-voltage halogen lighting 230V (40-500W) and low-voltage halogen lighting in combination with a dimmable transformer. Use indoors only. This floor dimmer is fitted with a fuse.

The producer is not liable for damage caused by incorrect use or improper installation of the dimmer. The warranty period is 2 years from the date of purchase, to be proven by means of your purchase receipt. For optimum performance load the dimmer up to 80% of its maximum power!

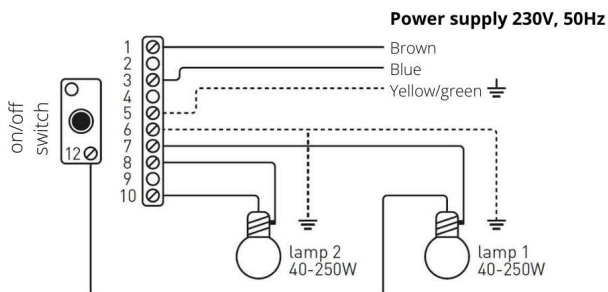

Lamp 1: on/off function

Lamp 2: to be operated with the sliding button. On/off and dimming.

INSTALLATION:

- Always switch off the power before installing!
- Unscrew the housing and remove the top.
- Strip the power supply wires sufficiently and tighten them firmly in position 1 & 3 (see drawing).
- Install the wiring that controls the lamp for on/off switching (push button) at screw 7 & 12.
- And the wiring that dims the lamp by means of sliding switch at screw 8 & 10.
- Replace the top and tighten the screws. Make sure the wires are properly clamped under the strain reliefs.