


SPIRAL DRAIN CLEANER

Instructions for safety and use

The 15m spiral drain cleaner is intended for removal of severe contamination and root growth in pipes, such as sewage and rain drain pipes with a diameter of 40 to 125 mm. The manually operated spiral drain cleaner consists of a 15m spring coil with a cutter head or auger.

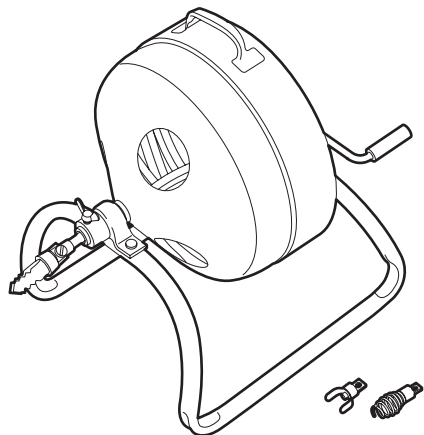

Caution!

Improper operation can injure the user or damage the device. Read the safety instructions first!

SAFETY INSTRUCTIONS



Safety for user

- Wear rubber gloves when using a chemical cleaner.

Check before use


- Device visually on defects.

Contact your rental company should you encounter any problems with the device!

Safety during use

- Keep the workplace clean. Dirt from drain pipes can make the surroundings slippery.


1. OPERATING FUNCTIONS

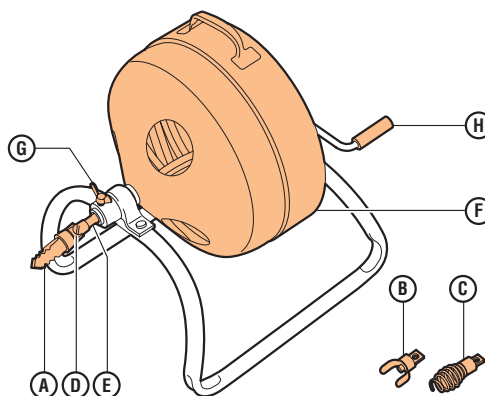

- A Cutter head \varnothing 45
 B Cutter head \varnothing 25
 C Auger
 D Screw

- E Coil
 F Drum
 G Wing nut
 H Crank

2. PREPARATION FOR USE

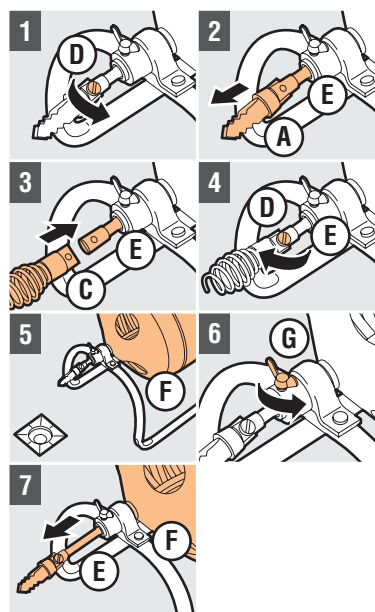


Choose cutter head or auger:

- A/B for blockage and root growth.
- C For drainpipes with angular bends.

- Unscrew D completely
- Pull A/B/C out E
- Push A/B/C in E
- Place D in E and tighten D
- Place F near the drain pipe opening
- Unscrew G
- Pull E approx. 30 cm out F

Caution! Do not feed the coil through ceramic sanitary. First remove the ceramic sanitary, avoid damage!

3. MANUAL USE SPIRAL DRAIN CLEANER

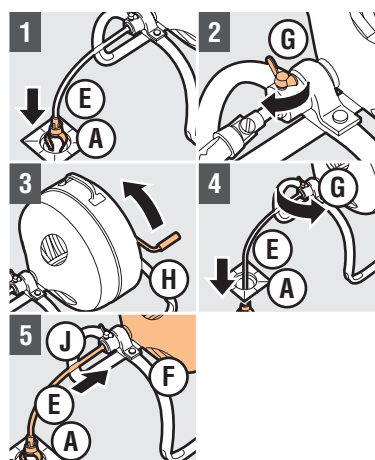

- Slide A/B/C with E in the drainpipe until you reach the blockage
- Tighten G
Caution! G tightening prevents snaring and excessive twisting of E in F!
- Turn H to clear blockage
- Loosen G and push A/B/C with E further into the drainpipe
Caution! Repeat 2, 3 and 4 until the drainpipe has been completely cleared!
- Withdraw A/B/C with E from drainpipe and push E in F
Caution! Should E get jammed loosen G, turn H and tighten G again when coil E has become unstuck!
Caution! Rinse pipeline thoroughly and check that water drains freely!

4. AFTER USE

- Clean device